

FLUSH STEEL COMMERCIAL DOORS

16GA (1.5mm), 18GA(1.1mm), 20GA (0.9mm)
Cold-rolled or galvanized steel skins.
Construction is 1-3/4" thick.





Hinge, closer, lock and strike plate reinforcements shall be provided.

Hinge reinforcement: 10GA(3.5mm)
Closer reinforcement: 12GA(2.5mm)
Lock reinforcement: 16GA(1.5mm)
Strike plate reinforcement: 16GA(1.5mm)

The top, bottom and side closures are fabricated from 16GA(1.5mm) thick channel shaped steel sections welded to the front and back door skins.


Flush top channel: 16GA(1.5mm)
Standard seamless edge.

Widths up to and including 4'0"
Heights up to and including 8'0"
Available with mineral fireboard core,
Polystyrene core, honeycomb core.

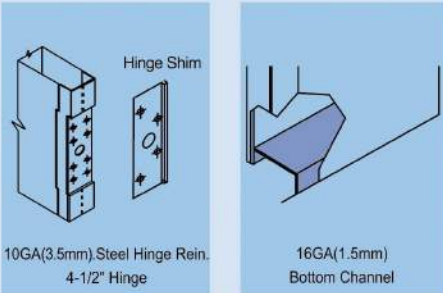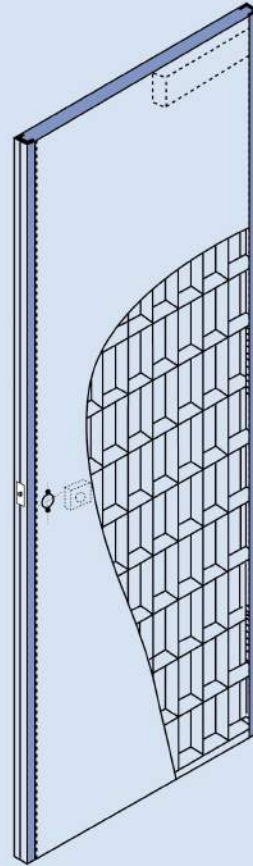


EMBOSSED STEEL COMMERCIAL DOORS

STEEL DOOR SKIN:
16GA (1.5mm), 18GA (1.1mm), 20GA (0.9mm)
GALVANIZED OR COLD-ROLLED STEEL
CONSTRUCTION IS 1-3/4" (45mm) THICK

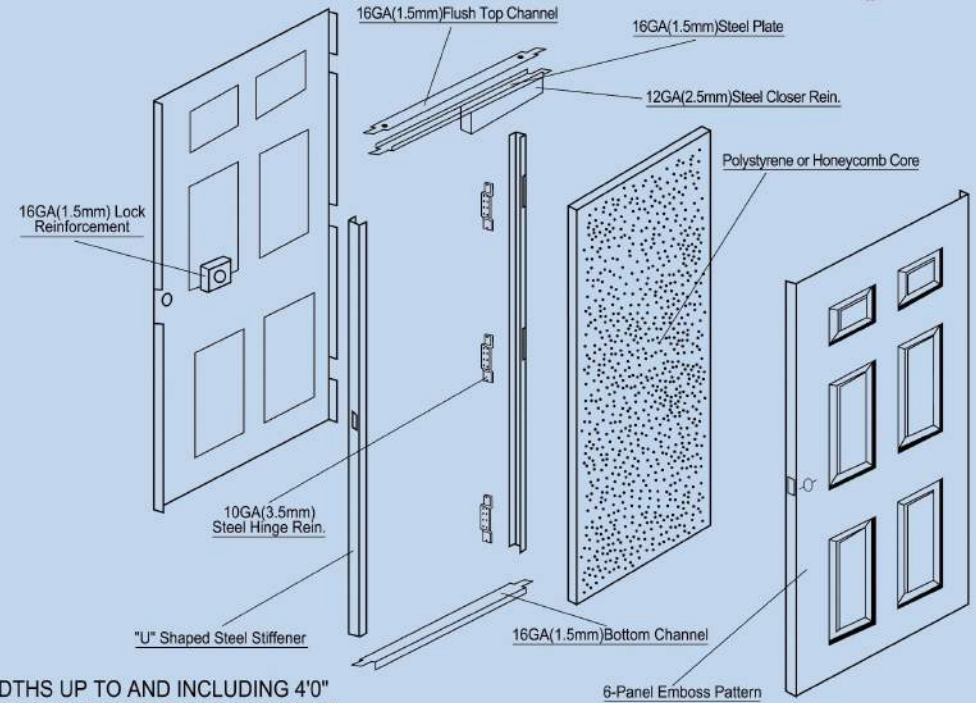


WIDTHS UP TO AND INCLUDING 4'0"
HEIGHTS UP TO AND INCLUDING 8'0"

DOOR TYPES

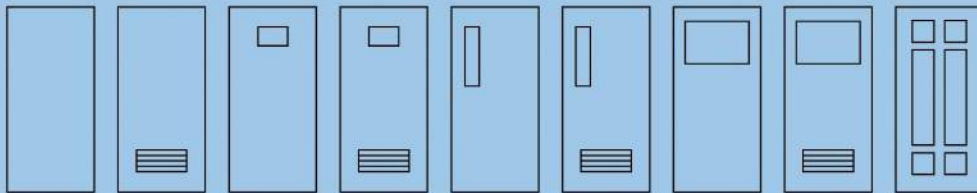


F L V VL N NL G GL E

CORE SERIES

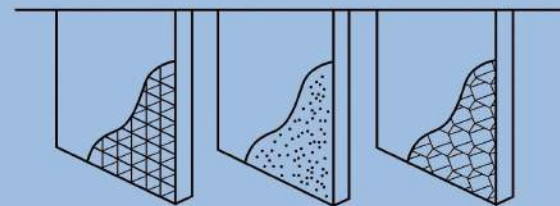

Mineral Fireboard Core Polystyrene Core Honeycomb Core

LOCK SERIES



Bored Lock Mortise Lock